


Save Hay. Save Time. Save Money.  
Go With The Original.



■ 2100 ■ 2574 ■ 2660 ■ 2665 ■ 2800

# OUT WITH THE MOLD, IN WITH THE CHEW

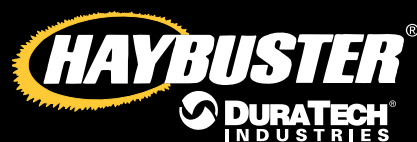

## PRODUCE MORE. WASTE LESS.

Haybuster bale processors produce more appetizing feed by removing the mold, dust, and debris that collects on grain bales over time. On top of that, the speed and ease of the equipment means you can feed your herd as much as they will eat as often as you want. This means you waste less. And if frequent feeding wasn't enough, Haybuster bale processors lay out better bedding. Nobody likes a lumpy mattress, including cows. Evenly distribute your bale for more comfortable conditions.

## IF IT AINT BROKE...

Haybuster pioneered an industry with its bale management system that dates further back than the 1980s. While we've adapted with the engineering some to build what our customers want, the premise behind our bale processors remains the same. Many try to imitate but no one can replicate what makes us great.

**Chain Table:** The angled chain table rotates the bale up against the slugbars and flails. This design allows hay to discharge from the machine with a consistent, continuous flow.

**Multiple Slugbars:** Increasing the number of slugbars slows down the grinding process for a more consistent and controlled release. Think of it more like shaving the bale rather than cutting. Smaller pieces of hay are easier to chew and further cleaned of debris.

**Adjustable Slugbars:** While we designed our Haybuster bale processors for faster chopping, we also give you control of your cut. Easily position the bale from the rotator and hammers to take any size bite out of the bale.

**Two-Stage Bale Loader:** Improve productivity by having an extra bale ready to grind. In models 2574 and up, the two-stage bale loader allows you to process a second bale immediately after the first one finishes.

**Options for Any Shape and Size:** Round bales, square bales, oblong bales — Haybuster has you covered. Our various makes and models scale with the type of bales used in your operation.



# SPECIFICATIONS

## WEIGHT

**Total:** 3,700 lbs. [1,679 kg]

## SHIPPING DIMENSIONS

**Width:** 8 ft. 5 in. [2.6 m] Loader & Deflector Folded

**Length:** 12 ft. 9 in. [3.89 m]

**Length:** 8 ft. 5 in. [2.6 m] Caster Wheels Removed

**Height:** 6 ft. 5 in. [1.96 m] Loader Folded

## TRANSPORT DIMENSIONS

**Width:** 10 ft. 8 in. [3.25 m]

**Length:** 12 ft. 9 in. [3.89 m]

**Height:** 6 ft. 5 in. [1.96 m] Loader Folded

## WORKING DIMENSIONS

**With Bale:**

**Width:** 13 ft. [3.96 m]

**Length:** 12 ft. 9 in. [3.89 m]

**Height:** 9 ft. 8 3/4 in. [2.97 m]

## CHASSIS

**Hitch:** Semi-Mounted, Attaches to Lower Lift Links of Tractor's 3-PT Hitch

**Tires:** [2] 9.5 x 14 - 8 Ply

**Wheels:** [2] 6 x 14 - 5 Bolt Drop Center

**Bearings:** Tapered Roller

**Axle:** Caster

## BALE LOADER

**Type:** Hydraulic with Mechanical Linkage

**Bale Tines:** [2] Fixed Width

**Hydraulic Cylinder:** [2] 2 1/2 in. X 16 in. [6.35 cm X 40.64 cm]

Double Acting

## BALE CONVEYOR

**Type:** 3 Roller Chains with Bolt-on Cross Slats

**Drive:** Hydraulic Motor with Hydraulic Flow Control

## BALE SHREDDER CHAMBER

**Max. Bale Size:** 6 ft. long X 6 1/2 ft. Dia. [1.83 m X 1.98 m]

**Max. Bale Weight:** 2,000 lbs. [907 kg]

**Rotor Length:** 78 in. [1.98 m]

**Rotor Diameter (Flails Extended):** 25 in. [63.5 cm]

**Rotor Bearing:** Ball, 1 3/4 in. [4.45 cm]

**Number of Flails:** 30

**Flail Type:** Heavy Duty Flails, 7/16 in. [11.11 mm] Thick, 3 lbs. [1.36 kg], Heat Treated Spring Steel, Swinging

**Number of Stripper Plates:** 1

**Number of Slug Bars:** 5

**Deflector Shield:** 6 Adjustment Positions Through 120° Range

**Max. Horizontal Spread:** Straw Up to 50 ft.

## OPERATOR CONTROLS

**Loader:** 1 Set of Tractor Hydraulic Outlets

**Bale Conveyor:** 1 Set of Tractor Hydraulic Outlets

**Bale Conveyor Speed:** Adjustable Hydraulic Flow Control Valve

**Slug Bar:** Shim Adjustable

**Deflector Shield Position:** Hand Lever with 6 Position Settings Through 120° Range

## REQUIREMENTS FOR OPERATION

**PTO Horsepower Required:** 65 to 155

**Three Point Hitch:** CAT II / III

**Min. Hitch Lift Capacity:** 4,000 lbs. [1,814 kg]

**PTO Type:** 1,000 rpm, 1 3/8 in. Dia. Shaft with 21 Splines

**Min. Hydraulic Output:** 8 gpm at 1,800 psi [30.3 lpm x 10,345 kpa]

**Hydraulic Remote Controls:** 2 Double-Acting Control Valves with Quick Coupler Outlets

**Tractor Weight:** Must Be of Equal or Greater Weight Than That of a 2100 and 1 Bale

**SMV Sign:** Standard Equipment

**Road Lights:** Standard Equipment



# 2100



2574

# SPECIFICATIONS

## WEIGHT

**Total:** 6,325 lbs. [2,868.97 kg]

## TRANSPORT DIMENSIONS

**Empty, Loader Fully Raised:**

**Width:** 8 ft. 11 in. [2.72 m]

**Length:** 16 ft. 6 in. [5.03 m]

**Height:** 8 ft. 4 in. [2.54 m]

## WORKING DIMENSIONS

**With 1 Bale, Loader Fully Raised:**

**Width:** 10 ft. 3 in. [3.12 m]

**Length:** 16 ft. 6 in. [5.03 m]

**Height:** 10 ft. 9 in. [3.28 m]

**With 2 Bales, Loader in Bale Transport:**

**Width:** 10 ft. 3 in. [3.12 m]

**Length:** 22 ft. 7 in. [6.88 m]

**Height:** 10 ft. 9 in. [3.28 m]

## CHASSIS

**Towing Arrangement:** Clevis Type Hitch,  
Height Adjustable with Safety Chain

**Hitch Jack:** 5,000 lbs. [2,268 kg] Rating - 15 in. Lift

**Wheel Hub Bearings:** Tapered Roller

**Axle Extension:** Optional 12 in.

## OPERATOR CONTROLS

Two Hydraulic Outlets Required

1 set for electric over hydraulics [standard equipment] –  
controls loader function, fan spout for vertical and horizontal  
adjustment. Requires 12-volt DC with three-pin power outlet.

**Bale Conveyor:** 1 set of Tractor Hydraulic Outlets

**Bale Conveyor Speed:** Adjustable Hydraulic Flow Control Valve

**Slug Bar:** Single Point Adjustment With 5 Settings

## BALE LOADER

**Type:** Hydraulic with 2 Stage Twin Boom Arms

**Bale Tines:** Tubular Steel With 10° of Float,  
4-Position Width Adjustable

**Hydraulic Cylinder:** 4 in. X 24 in. [10.16 cm X 60.96 cm]  
Double-Acting

## BALE CONVEYOR

**Type:** 3 Roller Chains with Bolt-On Cross Slats

**Drive:** Hydraulic Orbital Motor, Hydraulic Flow Control Valve

## BALE SHREDDER CHAMBER

**Max. Bale Size:** 6 ft. long X 6 1/2 ft. Dia. [1.83 m X 1.98 m]

**Max. Bale Weight:** 2,200 lbs. [998 kg]

**Rotor Length:** 78 in. [1.98 m]

**Rotor Diameter [Flails Extended]:** 25 in. [63.5 cm]

**Rotor Bearing:** Ball, 1 3/4 in. [4.45 cm]

**Number of Flails:** 40

**Flail Type:** Heavy Duty, Hardened Spring Steel, Swinging

**Re-Cutter Screen Type:** Helical-Slotted, Round [5 Sizes]

**Transfer Auger Diameter:** 12 in. [30.48 cm]

**Number of Slug Bars:** 9 Optional, 10 Fixed

**Slug Bar Height:** Single Point Adjustment with 5 Settings

## BLOWER FAN

**Size:** 44 in. Dia. [1.12 m]

**Number of Paddles:** 6 [AR 400 Steel]

Fan Lined with AR 400 Steel

## SPOUT OPERATION (JOY STICK CONTROLLED FROM TRACTOR CAB)

**Vertical:** Fan Housing Rotated by Hydraulic Cylinder

**Horizontal:** Spout Rotates 360° by Hydraulic Motor

**Outlet:** 3 ft. Curved with an Adjustable Deflector

**Protection:** Hinged Break-Away, Sheer Bolt Protected

## REQUIREMENTS FOR OPERATION

**Order Spout**

**PTO Horsepower Required:** 125 to 150

**PTO Type:** 1,000 rpm, 1 3/8 in. Dia. PTO Shaft with 21 Splines

**Min. Tractor Hydraulic Output:** 8 gpm at 1,500 psi [30.3 m X 10,345 kpa]

**Tractor Hydraulic Controls:** 2 Double-Acting Control Valves  
with Quick Coupler Outlets

**Tractor Weight:** Must Be of Equal or Greater Weight Than  
That of the 2564 with 2 Bales

**SMV Sign:** Standard Equipment

**Road Lights:** Standard Equipment





# 2660

# SPECIFICATIONS

## WEIGHT

**Total:** 5,025 lbs. [2,279.3 kg]

**Tongue (Bale Loader Fully Raised):** 1,500 lbs. [680.39 kg]

## TRANSPORT DIMENSIONS

**Baler Loader Fully Raised, Deflector Folded:**

**Width:** 8 ft. 4 in. [2.54 m], 9 ft. 2 in. [2.79 m] with Grain Tank

**Length:** 14 ft. 11 in. [4.55 m]

**Height:** 8 ft. 5 in. [2.56 m]

## WORKING DIMENSIONS

**With 1 Bale, Deflector in Spread Position:**

**Width:** 10 ft. 10 in. [3.3 m]

**Length:** 14 ft. 11 in. [4.55 m]

**Height:** 11 ft. [3.35 m]

**With 2 Bales, Deflector in Spread Position:**

**Width:** 10 ft. 10 in. [3.3 m]

**Length:** 19 ft. 7 in. [5.97 m]

**Height:** 11 ft. [3.35 m]

## CHASSIS

**Towing Arrangement:** Clevis Type Hitch

**Jack Capacity:** 5,000 lbs. [2,273 kg]

**Jack Travel:** 10 in. [25.4 cm]

**Bearing Type:** Tapered Roller

## BALE LOADER

**Type:** Integral 2-Stage, Twin Boom Arms

**Bale Tines:** Tubular Steel, 10° Float, 4-Position Width Adjustable

**Hydraulic Cylinder:** 4 1/2 in. X 24 in. [11.43 cm X 60.96 cm]

Double-Acting

## BALE CONVEYOR

**Type:** 3 Roller Chains with Bolt-On Cross Slat

**Drive:** Hydraulic Orbital Motor with Adjustable Flow Control

**Drive Shaft Bearings:** 1 1/4 in. [3.18 cm]

**Drive Shafts:** 1 1/4 in. [3.18 cm]

## BALE SHREDDER CHAMBER

**Max. Bale Weight Each:** 2,200 lbs. [998 kg]

**Rotor Length:** 78 in. [1.98 m]

**Rotor Diameter (Flails Extended):** 25 in. [63.5 cm]

**Rotor Bearing:** Ball, 2 in. [5.08 cm]

**Number of Flails:** 30

**Flail Type:** Heavy Duty, 7/16 in. [11.11 mm] Thick, 3 lbs. [1.36 kg], Heat Treated Spring Steel, Swinging

**Number of Stripper Channels:** 1

**Number of Slug Bars:** 5

**Slug Bar:** Single Point, 9 Adjustment Settings Through 180° Range

**Delivery:** Right Hand Discharge

**Deflector:** 6 Adjustment Settings Through 120° Range

**Max. Horizontal Spread:** Straw, Up to 50 ft. [15.24 m]

## OPERATOR CONTROLS

**Loader:** 1 Tractor Double-Acting Hydraulic Valve

**Bale Conveyor:** 1 Tractor Double-Acting Hydraulic Valve

**Bale Conveyor Speed:** Conveyor Speed Control Valve

**Slug Bar:** Hand Lever with 5 Settings

**Deflector:** Hand Lever with 6 Settings

## REQUIREMENTS FOR OPERATION

**PTO Horsepower Required:** 65 to 155

**PTO Type:** 1,000 rpm, 1 3/8 in. Dia. PTO Shaft with 21 Splines

Choice of Standard PTO Shaft or Constant Velocity PTO Shaft

**Min. Tractor Hydraulic Output:** 8 gpm at 1,500 psi [30.3 lpm X 10,345 kpa]

**Tractor Hydraulic Controls:** 2 Double-Acting Control Valves with Quick Coupler Outlets

**Tractor Weight:** Must Be of Equal or Greater Weight Than That of a 2660 with 2 Bales

**SMV Sign:** Standard Equipment

**Road Lights:** Standard Equipment





# 2665

# SPECIFICATIONS

## WEIGHT

**Total:** 5,150 lbs. (2,336 kg)

**Tongue (Bale Loader Fully Raised):** 1,560 lbs. (707.6 kg)

## TRANSPORT DIMENSIONS

**Bale Loader Fully Raised, Deflector Folded:**

**Width:** 8 ft. 4 in. (2.54 m)

**Length:** 14 ft. 11 in. (4.55 m)

**Height:** 8 ft. 5 in. (2.56 m)

## WORKING DIMENSIONS

**With 1 Bale, Deflector in Spread Position:**

**Width:** 10 ft. 10 in. (3.30 m)

**Length:** 14 ft. 11 in. (4.55 m)

**Height:** 11 ft. (3.35 m)

**With 2 Bales, Deflector in Spread Position:**

**Width:** 10 ft. 10 in. (3.30 m)

**Length:** 19 ft. 7 in. (5.95 m)

**Height:** 11 ft. (3.35 m)

## CHASSIS

**Towing Arrangement:** Clevis Type Hitch

**Jack Capacity:** 5,000 lbs. (2,268 kg)

**Jack Travel:** 10 in. (25.4 cm)

**Bearing Type:** Tapered Roller

## BALE LOADER

**Type:** Integral 2-Stage, Twin Boom Arms

**Bale Tines:** Tubular Steel, 10° Float, 4-Position Width Adjustable

**Hydraulic Cylinder:** 4 1/2 in. X 24 in. (11.43 cm X 60.96 cm)

Double-Acting

## BALE CONVEYOR

**Type:** 3 Roller Chains with Bolt-On Cross Slat

**Drive:** Hydraulic Orbital Motor with Adjustable Flow Control

**Drive Shaft Bearings:** 1 1/4 in. (3.18 cm)

**Drive Shafts:** 1 1/4 in. (3.18 cm)

## BALE SHREDDER CHAMBER

**Max. Bale Weight Each:** 2,200 lbs. (998 kg)

**Rotor Length:** 78 in. (1.98 m)

**Rotor Diameter (Flails Extended):** 25 in. (63.5 cm)

**Rotor Bearing:** Ball, 2 in. (5.08 cm)

**Rotor Speed:** 1,300 rpm

**Number of Flails:** 40

**Flail Type:** Heavy Duty, 7/16 in. (11.11 mm) Thick, 3 lbs. (1.36 kg), Heat Treated Spring Steel, Swinging

**Number of Stripper Channels:** 3

**Number of Slug Bars:** 9

**Slug Bar:** Single Point, 9 Adjustment Settings Through 180° Range, Optional Hydraulic Adjustment

**Delivery:** Right Hand Discharge

**Deflector:** 6 Adjustment Settings Through 120° Range, Optional Hydraulic Adjustment

**Max. Horizontal Spread:** Straw, Up to 50 ft. (15.24 m)

## OPERATOR CONTROLS

**Loader:** 1 Tractor Double-Acting Hydraulic Valve

**Bale Conveyor:** 1 Tractor Double-Acting Hydraulic Valve

**Bale Conveyor Speed:** Conveyor Speed Control Valve

**Slug Bar:** Hand Lever with 5 Settings, Optional Hydraulic Adjustment

**Deflector:** Hand Lever with 6 Settings, Optional Hydraulic Adjustment

## REQUIREMENTS FOR OPERATION

**PTO Horsepower Required:** 65 to 155

**PTO Type:** Standard or Constant Velocity 1,000 rpm, 1 3/8 in. Dia. PTO Shaft with 21 Splines


**Min. Tractor Hydraulic Output:** 8 gpm at 1,500 psi (30.3 lpm X 10,345 kpa)

**Tractor Hydraulic Controls:** 2 Double-Acting Control Valves with Quick Coupler Outlets

**Tractor Weight:** Must Be of Equal or Greater Weight Than That of a 2665 with 2 Bales

**SMV Sign:** Standard Equipment

**Road Lights:** Standard Equipment







# 2800

# SPECIFICATIONS

## WEIGHT

**Total:** 7,300 lbs. [3,311kg]

**Tongue (Bale Loader Fully Raised):** 2,550 lbs. [1,156kg]

**Tongue (Bale Loader Down):** 2,150 lbs. [975kg]

## TRANSPORT DIMENSIONS

**Width:** 8 ft. 5 in. [2.57 m]

**Length:** 17 ft. 7 in. [5.36 m]

**Height:** 8 ft. 6 in. [2.59 m]

## WORKING DIMENSIONS

**With 1 Bale, Deflector in Spread Position:**

**Width:** 10 ft. 10 in. [3.30 m]

**Height:** 10 ft. [3.04 m]

**Length:** 24 ft. 2 in. [7.37 m]

**With 2 Bales, Deflector in Spread Position:**

**Width:** 10 ft. 10 in. [3.30 m]

**Height:** 10 ft. [3.04 m]

**Length:** 27 ft. 5 in. [8.36 m]

## CHASSIS

**Towing Arrangement:** Clevis Type Hitch

**Jack Capacity:** 7,000 lbs. [3,175 kg]

**Jack Travel:** 10 ft. [25.4 cm]

**Tires:** [2] 16.5 X 16.1 -10 Ply

**Wheels:** [2] 16.1 X 12-8 Bolt, Drop Center

**Bearings:** Tapered Roller

## BALE LOADER

**Type:** Hydraulic Twin Boom Arms, Squeeze Arms for Square Bales

**Bale Tines:** Tubular Steel, 10° Float, 4-Position Adjustment for Round Bales

## SEALED OIL LUBE CHAIN CASE

Reverses Rotation and Increases Rotor Speed

Double 80 Roller Chain

## BALE CONVEYOR

**Type:** Four Roller Chain with Bolt on Cross Slat

**Drive:** Hydraulic Orbital Motor with Adjustable Flow Control

## BALE SHREDDER CHAMBER

**Maximum Bale Size:**

**Round:** 6 ft. long X 6 1/2 in. Dia. [1.83 m X 1.98 m]

**Square:** 52 in. X 52 in. X 8 ft. long [1.32 m X 1.32 m X 2.4 m]

**Max. Bale Weight:** 2,200 lbs. [998 kg]

**Shredder Chamber Length:** 120 in. [3.05 m]

**Shredder Chamber Width:** 91 in. [2.31 m]

**Rotor Diameter (Flails Extended):** 26 in. [66 cm]

**Rotor Bearing:** Ball, 2 in. [5.08 cm]

**Number of Flails:** 40

**Flail Type:** Heavy Duty, 7/16 in. [11.11 mm] Thick, 3 lbs. [1.36 kg], Heat Treated Spring Steel, Swinging

**Number of Stripper Plates:** Not Available at This Time

**Deflector:** Split, Hydraulic with Infinite Settings, 120° Range

**Horizontal Spread Distance:** Straw, Up to 50 in. [15.24 m]

## OPERATOR CONTROLS

Loader, Conveyor, Deflector, Squeeze Loader, and Slug Bar-1 Hydraulic Remote with Electric Over Hydraulic Finger Tip Controls

**Bale Conveyor Speed:** Conveyor Speed Control Valve

**Deflector Position Setting:** Hydraulic with Split Deflector

**Slug Bar:** Hydraulic Adjustment with Infinite Adjustment

## REQUIREMENTS FOR OPERATION

**PTO Horsepower Required:** 90 minimum

**PTO Type:** 1,000 rpm, 1 1/8 in. Dia. Shaft with 21 Splines

**Min. Hydraulic Output:** 8 gpm at 1,500 psi [30.3 lpm. x 10,345 kpa]

**Hydraulic Remote Controls:** 1 Double-Acting Control Valve with Quick Coupler Outlets

**Tractor Weight:** Must Be of Equal or Greater Weight Than That of a 2800 with 2 Bales

**SMV Sign:** Standard Equipment

**Road Lights:** Standard Equipment





# MADE TO BE PASSED DOWN

**Haybuster products last.** Few things fill us up with pride like when we see our equipment working in the field 10, 20, 30 or [seriously] even 40 years after it left our facility. Haybuster pioneered the hay processing industry in the 1960s and continues to produce best-in-class machines by sticking with two enduring philosophies: **Build Strong. Build Simple.**

**Build Strong.** Toughness comes from a combination of materials and craftsmanship. We don't skimp on the steel we put into every Haybuster product. And when it comes to craftsmanship, we keep our facilities here in the United States. It's great to see Haybuster products on jobsites around the world, but we'll always make sure our quality control stays at the same place our raw materials are cut, molded, fabricated, assembled, painted, and shipped.

**Build Simple.** Every owner should have the ability to maintain, service, and fix their equipment. Hiring a technician should be a luxury or last resort. In an age of smart technologies and the Internet of things, we keep our products more straightforward on purpose. New is best, but nothing is worse than seeing something crafted with care left for scrap because of outdated software. Sometimes it really is all about grinding hay, grains, and corn.





MOBILE. GET IT DONE. HAYBUSTER



701-252-4601

P.O. Box 1940 - Jamestown, ND 58401